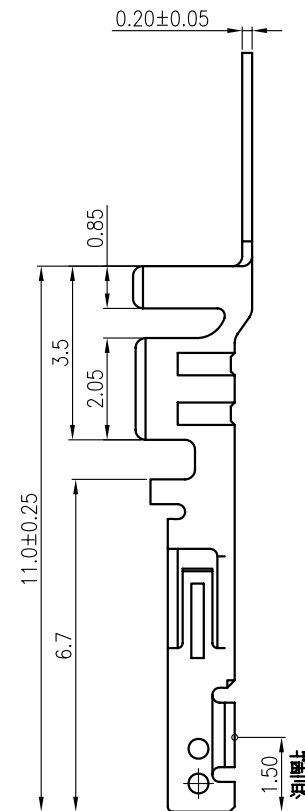
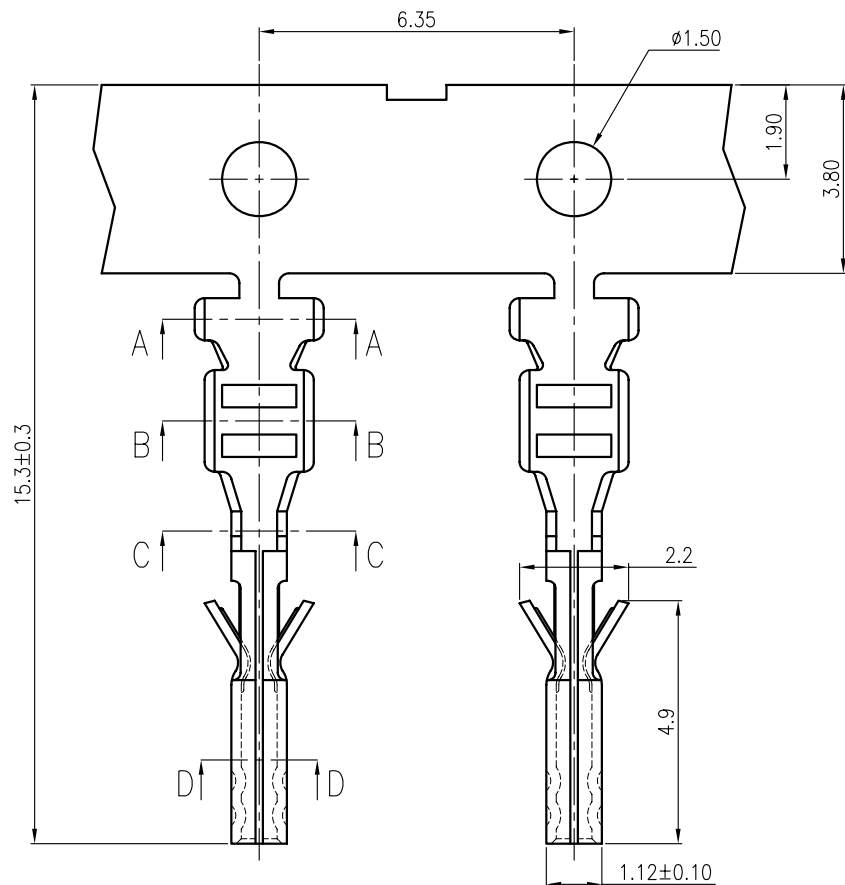







Specifications:

Current Rating: 5.0A AC/DC #22AWG
 Voltage Rating: 250V AC/DC
 Contact Resistance: 10m ohm. max.
 Withstanding Voltage: 1,500V AC/minute
 Operating Temperature Range: -25°C ~ +85°C
 Application Wires: AWG 20 to 24
 Mates With 5560 Series Housing
 Material and Finish
 Contact: Phosphor Bronze
 Finish: Tin Plated
 Packing: 10,000 pcs/Reel

How To Order


5560TX-XX-X

Blank: 鬆端
 A: 緊端 (用於4PIN以下)
 Blank: Phosphor Bronze
 BS: Brass
 Blank: Tin Plated
 G: Gold Plated
 T: Terminal



Part No.	M
5560TX-XX	0.59
5560TX-XX-A	0.54

RoHS Compliant

GENERAL TOLERANCE: .X=±0.2 .XX=±0.15			
UNIT: MM	DESCRIPTION:		SIZE A4
SCALE: 1:1	3.0mm Wire to Board Terminal		
SHEET: 1/1	PART NO:		
PROJECTION: 	5560TX-XX-X		