

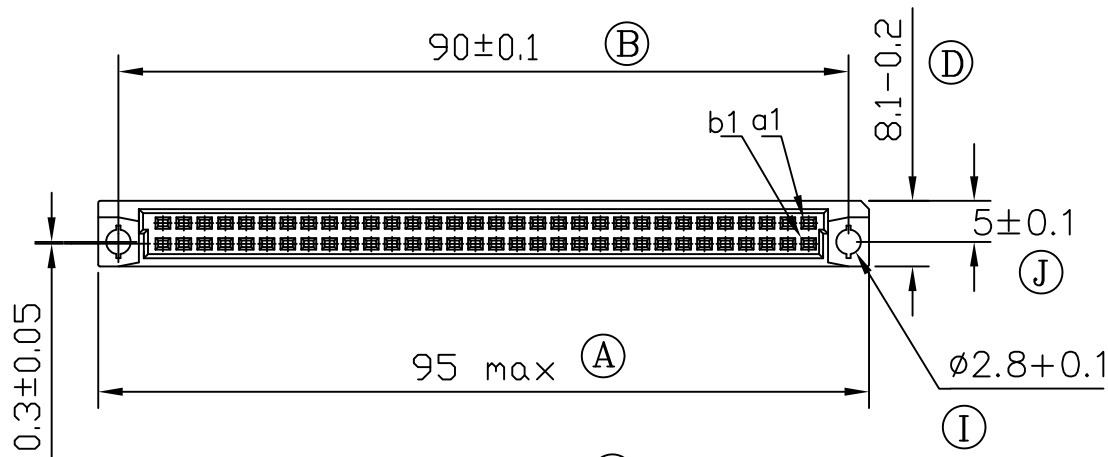
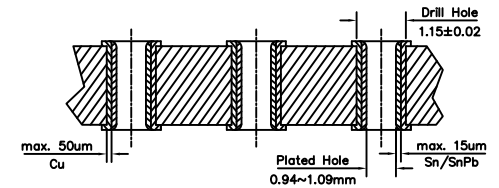


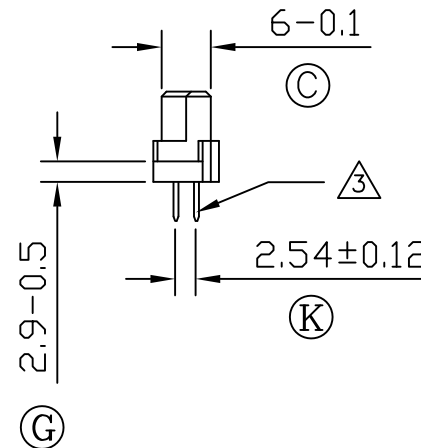


NOTES :

- ① CONNECTOR MEETS REQUIREMENT OF DIN 41612
- ② MATERIAL
-HOUSING: GLASS-FILLED PBT, COLOR GREY, UL 94V-0
-CONTACTS: COPPER ALLOY
- ③ CONTACT TAIL DIMENSION (THICKNESS x WIDTH x LENGTH)
T : 0.3±0.02 x 0.64±0.04 x 4±0.2
- ④ CONTACT FINISH (OPTION IN PART NUMBER)
-1: CLASS 1
-2: CLASS 2
BLANK: CLASS 3
-L: CONTACT LUBRICATED WITH LUBRICANT
- ⑤ CONNECTOR PRINTED WITH COMPANY NAME, PART NUMBER, AND BATCH NUMBER

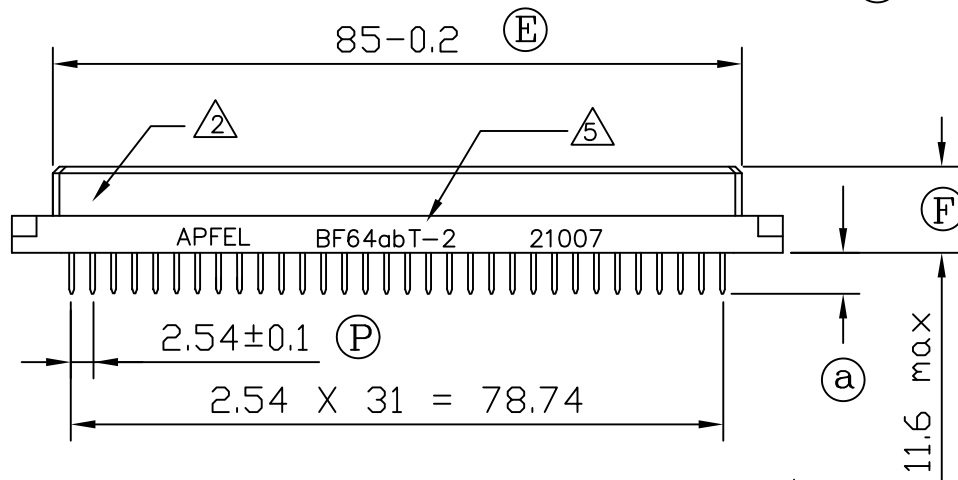

RECOMMENDED HOLE SPECIFICATIONS
SECTION A-A
SCALE 6 : 1

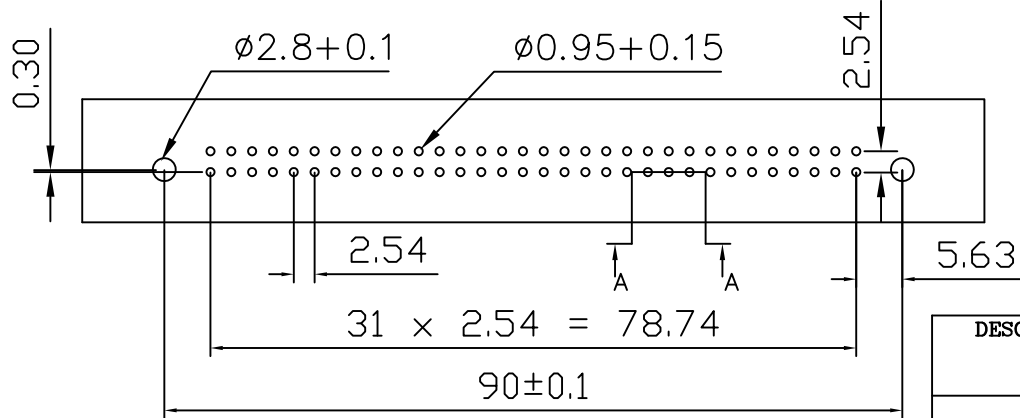

RECOMMENDED PCB HOLE LAYOUT
COMPONENT SIDE
SCALE 1 : 1



DESCRIPTION : FEMALE, TYPE B, 64 CONTACTS, STRAIGHT SOLDER CONNECTORS CUSTOMER DRAWING				MILLIMETRE	
PART NUMBER				BF64ABT	
NO.1	BF64abT-1	NO.4	BF64abT-1L	UNITS mm	ANGLE ±1°
NO.2	BF64abT-2	NO.5	BF64abT-2L	SCALE 1:1	REV A
NO.3	BF64abT	NO.6	BF64abT-L		