

CODIGO

C0805-XX-Y5V

DESCRIPCION

X NF Z Y5V 50V SMD 0805

Application

The Hi-K (Y5V) dielectrics deliver high capacitance density and are ideally suited for applications where space is at a premium, or as replacement for tantalum capacitors. Typical applications include use as by-pass or decoupling elements. Best performance is obtained at or near room temperature, with low D.C. bias.

General Specification


- Operating temperature range: $-30^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Temperature coefficient: $+22-82\%$ maximum
- Capacitance Range: $10\text{nF} \sim 100\mu\text{F}$
- Capacitance Tolerance: $\pm 20\%$, $+80-20\%$ (Test condition: $C \leq 10\mu\text{F}$, $1 \pm 0.2\text{Vrms}$, 1KHz , $C > 10\mu\text{F}$, $0.5\text{V} \pm 0.2\text{Vrms}$, 120Hz)
- Rated Voltage: 6.3VDC , 10VDC , 16VDC , 25VDC , 50VDC
- Dissipation Factor: 5% Max(50V), 7% Max($16/25\text{V}$), 10% Max($10/6.3\text{V}$) (Test condition: same as Capacitance)

EXCEPTION : see details at <http://www.hitano.com.tw/pdf/MLCCApproval.pdf>


- Insulation resistance: $10,000\text{ MW}$ or 100 W-F min , whichever is less. (Test condition: rated voltage applied at 25°C)
- Dielectric strength: $>250\%$ of Rated Voltage, duration $1 \sim 5$ seconds, Charging and discharging current less than 50mA .

Characteristics


Capacitance change $\Delta C/C_{25}$ versus temperature T

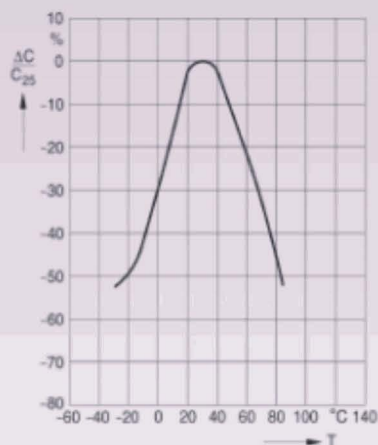


Capacitance change $\Delta C/C_0$ versus superimposed dc voltage V

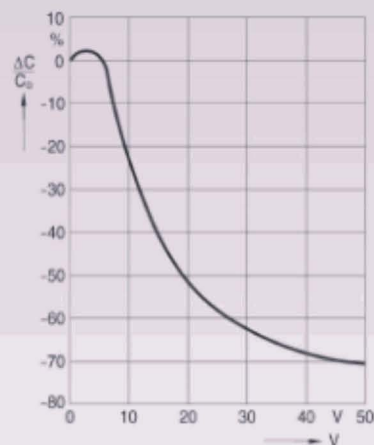

Insulation resistance R_{ins} versus Temperature T

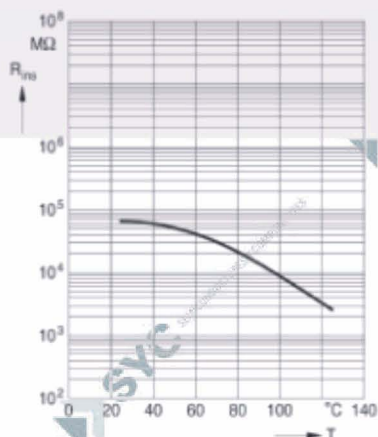

Capacitance change $\Delta C/C_1$ versus time (aging rate)

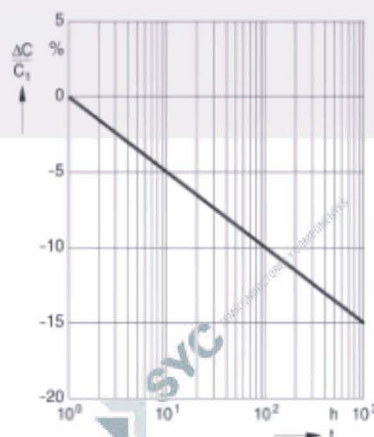

CODIGO

C0805-XX-Y5V

DESCRIPCION

X NF Z Y5V 50V SMD 0805

Size And Values Available (Y5V)

Size		0402				0603				0805				1206				1210				1812							
(L)	mm	1.00±0.05				1.600±0.10				2.00±0.20				3.20±0.20				3.20±0.30				4.50±0.30							
(W)	mm	0.50±0.05				0.80±0.10				1.25±0.20				1.60±0.20				2.50±0.20				3.20±0.30							
(T)	mm	0.50±0.05				0.80±0.12				1.25±0.20				1.65±0.20				2.00±0.20				2.50±0.20							
(t)	mm	0.15~0.35				0.27~0.60				0.30~0.70				0.30~0.70				0.30~0.70				0.35~1.00							
Cap.//	W.V.	6.3	10	16	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
10	nF			S					P					A					H										
15	nF			S					P					A					H										
22	nF			S					P					A					H										
33	nF			S					P					A					H										
47	nF			S					P					A					H										
68	nF			S					P					A					H										
100	nF			S					P				A	A					H										
150	nF							P	P					A	A				H										
220	nF		S				P	P	P					A	A				H										
330	nF		S				P	P	P					H	H				H										
470	nF	S	S				P	P	P				H	H	H				H										
680	nF	S					P	P					X	X	X				H	X									
1.0	uF	S					P	P					X	X	X				X	X									
2.2	uF				P	P						X	X	X				X	X	X									
3.3	uF				P							X	X					X	X										
4.7	uF				P							X	X					X	X										
10	uF									X	X					X	L				Z	X	L					G	
22	uF									X						L	L				Z	Z	Z				G		
47	uF															L					Z	Z				G			
100	uF																				G					G			

Thickness Code: Standard Packing Q'ty per reel

Thickness Code	Chip Size	Chip Thickness	Max Tape Thickness	Q'ty of carboard tape in		Q'ty of Embosses tape in	
				7" reel	13" reel	7" reel	13" reel
S	0402	0.50±0.05 mm	0.60 mm	10,000	50,000	—	—
P	0603	0.80±0.10 mm	0.95 mm	4,000	15,000	—	—
A	0805	0.60±0.10 mm	0.75 mm	4,000	15,000	—	—
H		0.85±0.10 mm	0.95 mm	4,000	15,000	—	—
X		1.25±0.10 mm	1.80 mm	—	—	3,000	10,000
H	1206	0.85±0.10 mm	0.90 mm	4,000	15,000	—	—
C		0.95±0.10 mm	1.80 mm	—	—	3,000	10,000
X		1.25±0.10 mm	1.80 mm	—	—	3,000	10,000
L		1.65±0.20 mm	1.80 mm	—	—	2,000	—
C	1210	0.95±0.10 mm	1.80 mm	—	—	3,000	10,000
X		1.25±0.10 mm	1.80 mm	—	—	2,000	—
L		1.65±0.20 mm	1.80 mm	—	—	2,000	—
Z		2.00±0.20 mm	2.20 mm	—	—	2,000	—
G		2.50±0.20 mm	2.75 mm	—	—	1,000	—
F		1.40±0.20 mm	1.80 mm	—	—	2,000	—
L	1808	1.65±0.20 mm	1.80 mm	—	—	2,000	—
Z		2.00±0.20 mm	2.20 mm	—	—	2,000	—
X	1812	1.25±0.20 mm	1.80 mm	—	—	1,000	—
L		1.65±0.20 mm	1.80 mm	—	—	1,000	—
Z		2.00±0.20 mm	2.20 mm	—	—	1,000	—
G		2.50±0.20 mm	2.75 mm	—	—	500	—
N		2.80±0.30 mm	3.00 mm	—	—	500	—
Z	2220	2.00±0.20 mm	2.20 mm	—	—	500	—
G		2.50±0.20 mm	2.75 mm	—	—	500	—