

H11L1M

H11L2M



H11L3M

DESCRIPTION

The H11LX series has a high speed integrated circuit detector optically coupled to a gallium-arsenide infrared emitting diode. The output incorporates a Schmitt trigger, which provides hysteresis for noise immunity and pulse shaping. The detector circuit is optimized for simplicity of operation and utilizes an open collector output for maximum application flexibility.

FEATURES

- High data rate, 1 MHz typical (NRZ)
- Free from latch up and oscillation throughout voltage and temperature ranges.
- Microprocessor compatible drive
- Logic compatible output sinks 16 mA at 0.4 V maximum
- Guaranteed on/off threshold hysteresis
- Wide supply voltage capability, compatible with all popular logic systems
- Underwriter Laboratory (UL) recognized—file #E90700

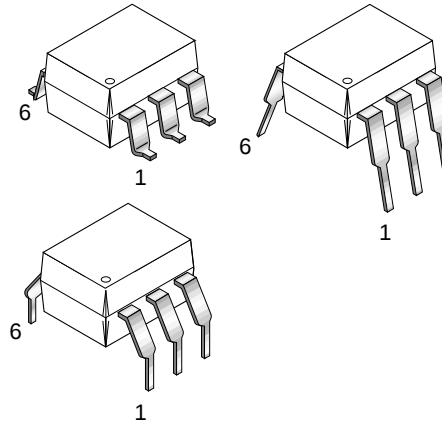

APPLICATIONS

- Logic to logic isolator
- Programmable current level sensor
- Line receiver—eliminate noise and transient problems
- A.C. to TTL conversion—square wave shaping
- Digital programming of power supplies
- Interfaces computers with peripherals

ABSOLUTE MAXIMUM RATINGS

Parameters	Symbol	Device	Value	Units
TOTAL DEVICE				
Storage Temperature	T _{STG}	All	-55 to +150	°C
Operating Temperature	T _{OPR}	All	-40 to +85	°C
Lead Solder Temperature	T _{SOL}	All	260 for 10 sec	°C
Total Device Power Dissipation @ 25°C Derate Above 25°C	P _D	All	250	mW
			2.94	mW/°C
EMITTER				
Continuous Forward Current	I _F	All	60	mA
Reverse Voltage	V _R	All	6	V
Forward Current - Peak (1 μs pulse, 300 pps)	I _{F(pk)}	All	3.0	A
LED Power Dissipation 25°C Ambient Derate Linearly From 25°C	P _D	All	120	mW
			1.41	mW/°C
DETECTOR				
Detector Power Dissipation @ 25°C Derate Linearly from 25°C	P _D	All	150	mW
			2.0	mW/°C
V ₄₅ Allowed Range	V _O	All	0 to 16	V
V ₆₅ Allowed Range	V _{CC}	All	3 to 16	V
I ₄ Output Current	I _O	All	50	mA

6-PIN DIP

OPTOISOLATORS LOGIC OUTPUT

H11L1M	H11L2M	H11L3M
--------	--------	--------

ELECTRICAL CHARACTERISTICS (T_A = 25°C Unless otherwise specified.)

INDIVIDUAL COMPONENT CHARACTERISTICS							
Parameters	Test Conditions	Symbol	Device	Min	Typ	Max	Units
EMITTER	I _F = 10 mA	V _F	All	0.75	1.2	1.5	V
	I _F = 0.3 mA				1.0		
Reverse Current	V _R = 3 V	I _R	All			10	μA
Capacitance	V = 0, f = 1.0 MHz	C _J	All			100	pF
DETECTOR		V _{CC}	All	3		15	V
	I _F = 0, V _{CC} = 5V	I _{CC(off)}	All		1.6	5.0	mA
	I _F = 0, V _{CC} = V _O = 15V	I _{OH}	All			100	μA

ISOLATION CHARACTERISTICS						
Parameters	Test Conditions	Symbol	Min	Typ	Max	Units
Input-Output Isolation Voltage	t =1 sec.	V _{ISO}	7500			V _{PEAK}
Isolation Capacitance	V _{I-O} = 0V, f = 1 MHz	C _{ISO}		0.4	0.6	pF
Isolation Resistance	V _{I-O} = ±500 VDC	R _{ISO}	10 ¹¹			Ω

6-PIN DIP

OPTOISOLATORS LOGIC OUTPUT

H11L1M

H11L2M

H11L3M

TRANSFER CHARACTERISTICS							
DC Characteristics	Test Conditions	Symbol	Device	Min	Typ	Max	Units
Supply Current	$I_F = 10\text{mA}$, $V_{CC} = 5\text{V}$	$I_{CC(on)}$	All		1.6	5.0	mA
Output Voltage, low	$R_L = 270\Omega$, $V_{CC} = 5\text{V}$, $I_F = I_{F(on)max}$	V_{OL}	All		0.2	0.4	V
Turn-On Threshold Current	$R_L = 270\Omega$, $V_{CC} = 5\text{V}$	$I_{F(on)}^*$	H11L1M			1.6	mA
			H11L2M			10.0	
			H11L3M			5.0	
Turn-Off Threshold Current	$R_L = 270\Omega$, $V_{CC} = 5\text{V}$	$I_{F(off)}$	All	0.3	1.0		mA
Hysteresis Ratio	$R_L = 270\Omega$, $V_{CC} = 5\text{V}$	$I_{F(off)}/I_{F(on)}$	All	0.50	0.75	0.90	
AC Characteristics	Test Conditions	Symbol	Device	Min	Typ	Max	Units
SWITCHING SPEED							
Turn-On time	$R_L = 270\Omega$, $V_{CC} = 5\text{V}$, $I_F = I_{F(on)}$, $T_A = 25^\circ\text{C}$	t_{on}	All		1.0		μs
					0.65		
						4	
Fall Time	$R_L = 270\Omega$, $V_{CC} = 5\text{V}$, $I_F = I_{F(on)}$, $T_A = 25^\circ\text{C}$	t_f	All		0.1		μs
					.05		
					0.1		
Turn-Off Time	$R_L = 270\Omega$, $V_{CC} = 5\text{V}$, $I_F = I_{F(on)}$, $T_A = 25^\circ\text{C}$	t_{off}	All		2.0		μs
					1.2		
						4	
Rise time	$R_L = 270\Omega$, $V_{CC} = 5\text{V}$, $I_F = I_{F(on)}$, $T_A = 25^\circ\text{C}$	t_r	All		0.1		μs
					0.07		
					0.1		
Data Rate			All		1.0		MHz

NOTE:

*Maximum $I_{F(ON)}$ is the maximum current required to trigger the output. For example, a 1.6mA maximum trigger current would require the LED to be driven at a current greater than 1.6mA to guarantee the device will turn on. A 10% guard band is recommended to account for degradation of the LED over its lifetime. The maximum allowable LED drive current is 60mA.

6-PIN DIP OPTOISOLATORS LOGIC OUTPUT

H11L1M

H11L2M

H11L3M

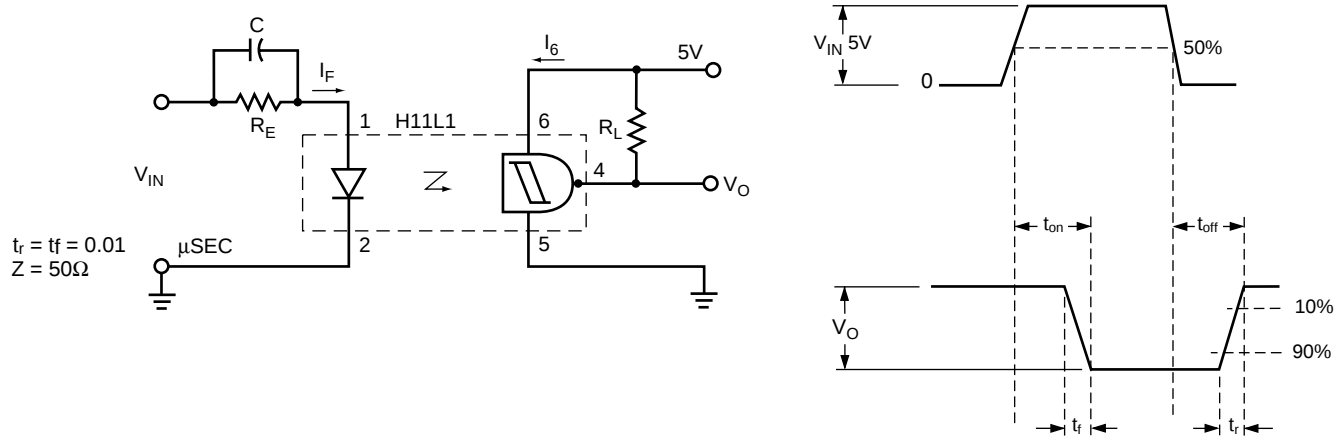


Figure 1. Switching Test Circuit and Waveforms

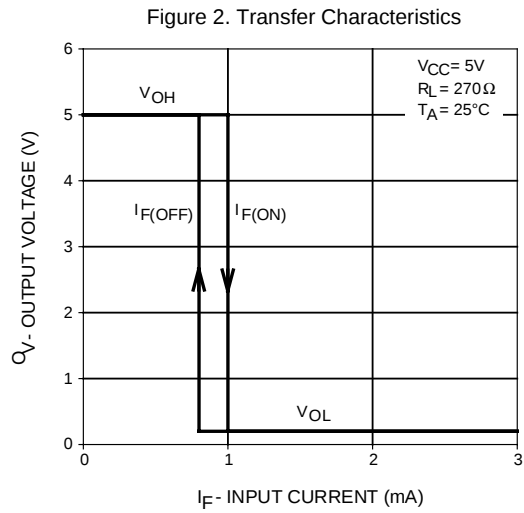


Figure 2. Transfer Characteristics

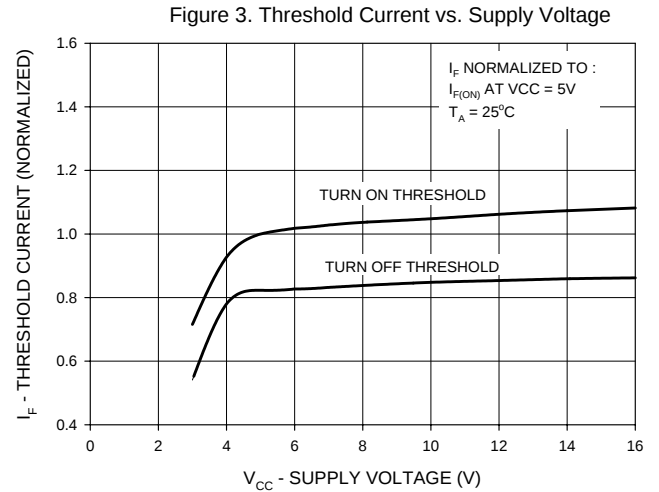


Figure 3. Threshold Current vs. Supply Voltage

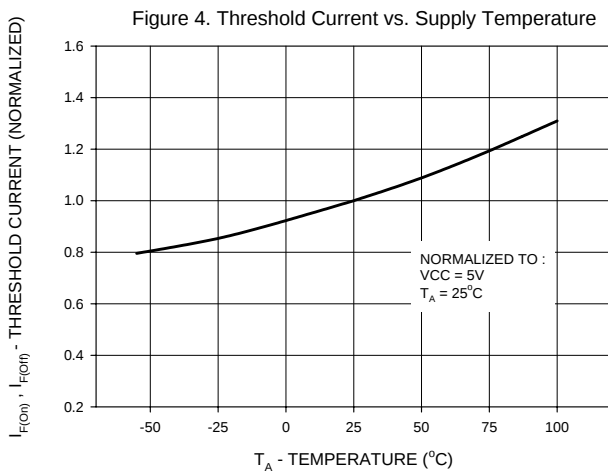


Figure 4. Threshold Current vs. Supply Temperature

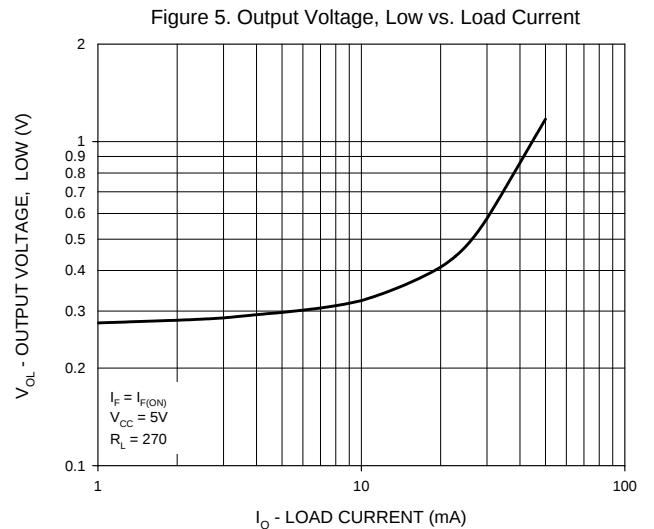


Figure 5. Output Voltage, Low vs. Load Current

6-PIN DIP

OPTOISOLATORS LOGIC OUTPUT

H11L1M

H11L2M

H11L3M

Figure 6. Supply Current vs. Supply Voltage


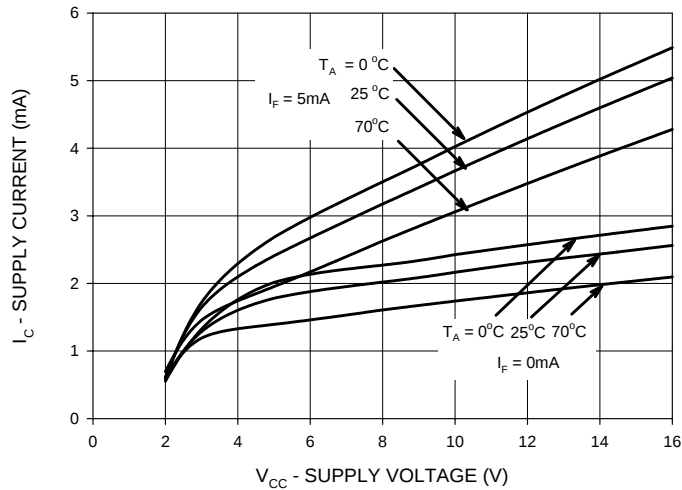


Figure 7. LED Forward Voltage vs. Forward Current

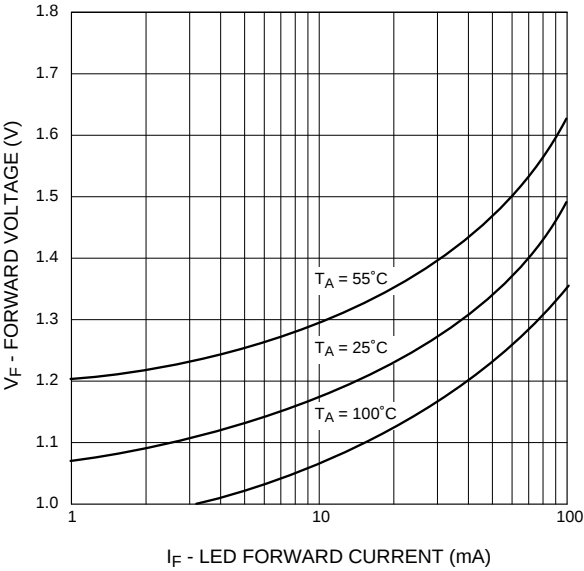


6-PIN DIP OPTOISOLATORS LOGIC OUTPUT

H11L1M


H11L2M

H11L3M


Package Dimensions (Through Hole)

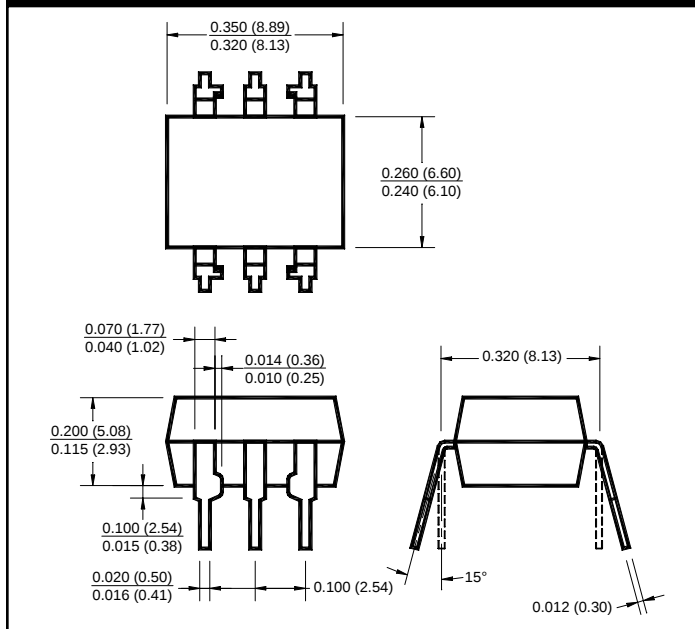


Package Dimensions (Surface Mount)

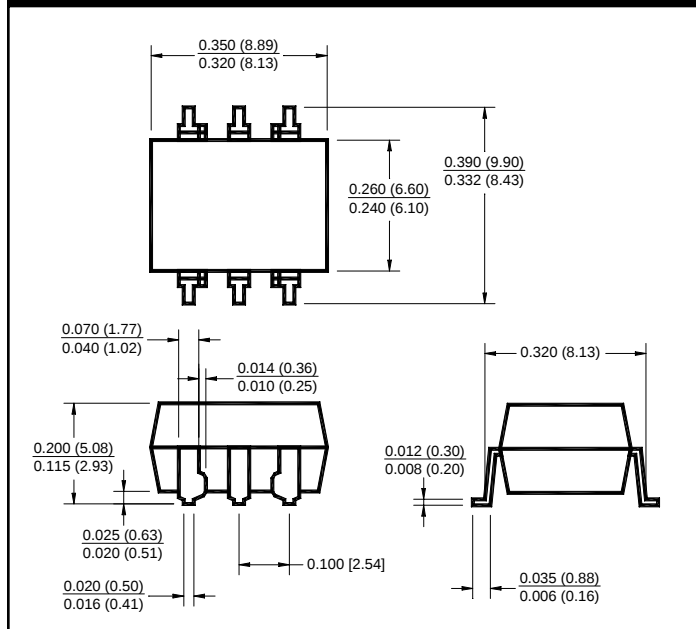

Package Dimensions (0.4" Lead Spacing)

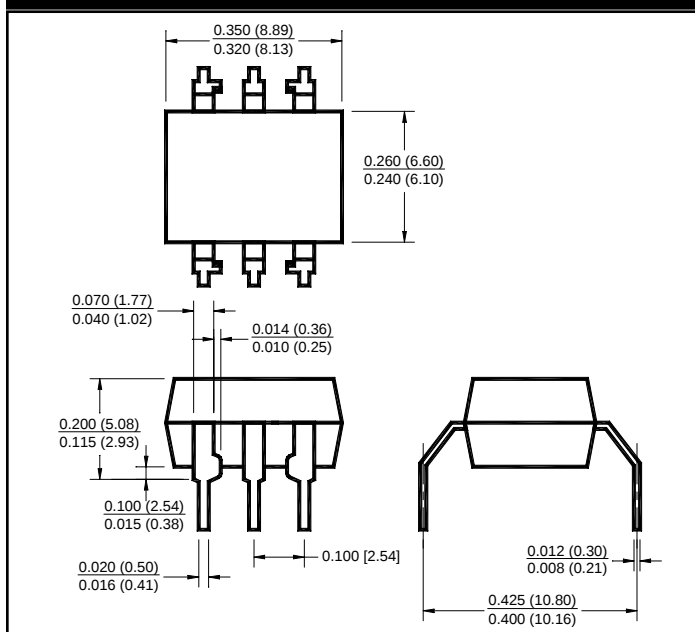

**Recommended Pad Layout for
Surface Mount Leadform**

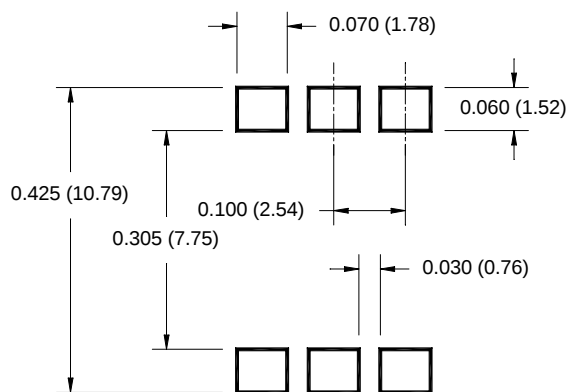

NOTE

All dimensions are in inches (millimeters)

6-PIN DIP OPTOISOLATORS LOGIC OUTPUT

H11L1M


H11L2M

H11L3M

ORDERING INFORMATION

Option/Order Entry Identifier	Description
S	Surface Mount Lead Bend
SR2	Surface Mount; Tape and reel
T	0.4" Lead Spacing
V	VDE 0884
TV	VDE 0884, 0.4" Lead Spacing
5V	VDE 0884, Surface Mount
SR2V	VDE 0884, Surface Mount, Tape & Reel

Carrier Tape Specifications ("D" Taping Orientation)

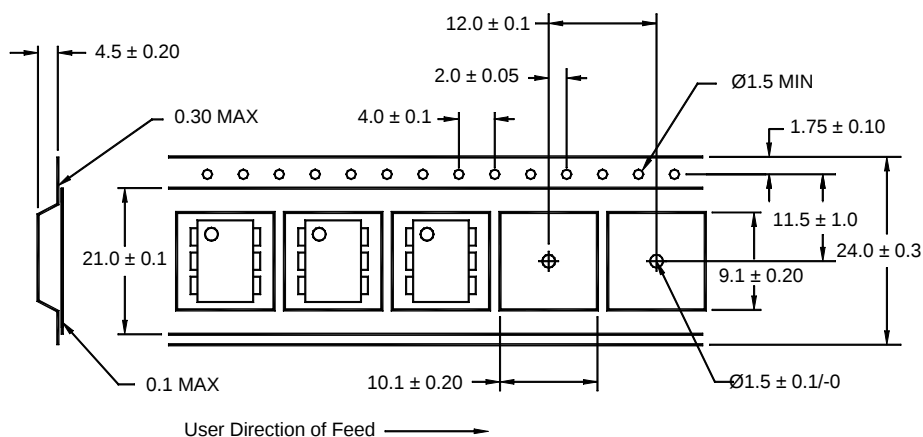

NOTE

All dimensions are in inches (millimeters)