

Dual Common Cathode Schottky Rectifier


TO-220AB




MBR30x5CT




ITO-220AB




MBRF30x5CT



TO-263AB



MBRB30x5CT



FEATURES

- Power pack
- Guardring for overvoltage protection
- Low power loss, high efficiency
- Low forward voltage drop
- High forward surge capability
- High frequency operation
- Meets MSL level 1, per J-STD-020, LF maximum peak of 245 °C (for TO-263AB package)
- Solder bath temperature 275 °C maximum, 10 s, per JESD 22-B106 (for TO-220AB and ITO-220AB package)
- AEC-Q101 qualified
- Material categorization: For definitions of compliance please see www.vishay.com/doc?99912

RoHS COMPLIANT

TYPICAL APPLICATIONS

For use in low voltage, high frequency rectifier of switching mode power supplies, freewheeling diodes, DC/DC converters, and polarity protection application.

MECHANICAL DATA

Case: TO-220AB, ITO-220AB, TO-263AB

Molding compound meets UL 94 V-0 flammability rating
Base P/N-E3 - RoHS-compliant, commercial grade
Base P/NHE3 - RoHS-compliant, AEC-Q101 qualified

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD 22-B102
E3 suffix meets JESD 201 class 1A whisker test, HE3 suffix meets JESD 201 class 2 whisker test

Polarity: As marked

Mounting Torque: 10 in-lbs maximum

PRIMARY CHARACTERISTICS	
$I_{F(AV)}$	2 x 15 A
V_{RRM}	35 V to 45 V
I_{FSM}	200 A
V_F	0.60 V
T_J max.	150 °C
Package	TO-220AB, ITO-220AB, TO-263AB
Diode variations	Common cathode

MAXIMUM RATINGS (T_C = 25 °C unless otherwise noted)

PARAMETER		SYMBOL	MBR3035CT	MBR3045CT	UNIT
Maximum repetitive peak reverse voltage		V_{RRM}	35	45	V
Working peak reverse voltage		V_{RWM}	35	45	V
Maximum DC blocking voltage		V_{DC}	35	45	V
Maximum average forward rectified current	total device	$I_{F(AV)}$	30		A
	per diode		15		A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load per diode		I_{FSM}	200		A
Peak repetitive reverse current per diode at t_p = 2.0 µs, 1 kHz		I_{RRM}	2.0		A
Voltage rate of change (rated V_R)		dV/dt	10 000		V/µs
Operating junction temperature range		T_J	- 65 to + 150		°C
Storage temperature range		T_{STG}	- 65 to + 175		°C
Isolation voltage (ITO-220AB only) from terminal to heatsink t = 1 min		V_{AC}	1500		V

ELECTRICAL CHARACTERISTICS (T_C = 25 °C unless otherwise noted)					
PARAMETER	**SYMBOL**	**TEST CONDITIONS**		**VALUE**	**UNIT**
Maximum instantaneous forward voltage per diode	V_F (1)	I_F = 20 A	T_C = 125°C	0.60	V
		I_F = 30 A	T_C = 25°C	0.76	
		I_F = 30 A	T_C = 125°C	0.72	
Maximum instantaneous reverse current at DC blocking voltage per diode	I_R (1)	Rated V_R	T_J = 25 °C	1.0	mA
			T_J = 125 °C	60	

Notes

(1) Pulse test: 300 µs pulse width, 1 % duty cycle

(2) Pulse test: Pulse width ≤ 40 ms

THERMAL CHARACTERISTICS (T_C = 25 °C unless otherwise noted)					
PARAMETER	**SYMBOL**	**MBR**	**MBRF**	**MBRB**	**UNIT**
Typical thermal resistance per diode	$R_{\theta JC}$	1.5	4.5	1.5	°C/W

ORDERING INFORMATION (Example)					
PACKAGE	**PREFERRED P/N**	**UNIT WEIGHT (g)**	**PACKAGE CODE**	**BASE QUANTITY**	**DELIVERY MODE**
TO-220AB	MBR3045CT-E3/45	1.85	45	50/tube	Tube
ITO-220AB	MBRF3045CT-E3/45	1.99	45	50/tube	Tube
TO-263AB	MBRB3045CT-E3/45	1.35	45	50/tube	Tube
TO-263AB	MBRB3045CT-E3/81	1.35	81	800/reel	Tape and reel
TO-220AB	MBR3045CTHE3/45 (1)	1.85	45	50/tube	Tube
ITO-220AB	MBRF3045CTHE3/45 (1)	1.99	45	50/tube	Tube
TO-263AB	MBRB3045CTHE3/45 (1)	1.35	45	50/tube	Tube
TO-263AB	MBRB3045CTHE3/81 (1)	1.35	81	800/reel	Tape and reel

Note

(1) AEC-Q101 qualified

www.sycelectronica.com.ar

RATINGS AND CHARACTERISTICS CURVES

(T_A = 25 °C unless otherwise noted)

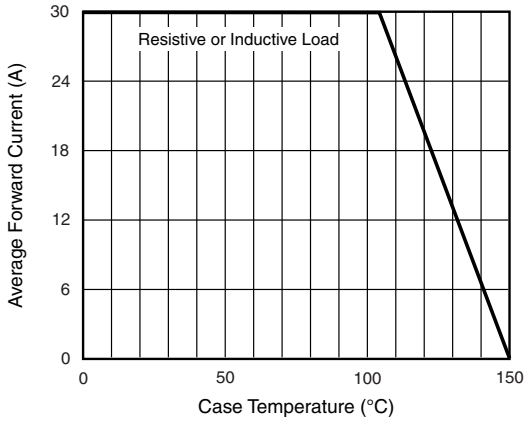


Fig. 1 - Forward Current Derating Curve

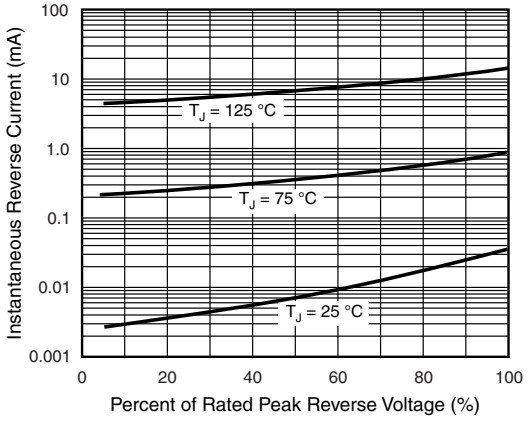


Fig. 4 - Typical Reverse Characteristics Per Diode

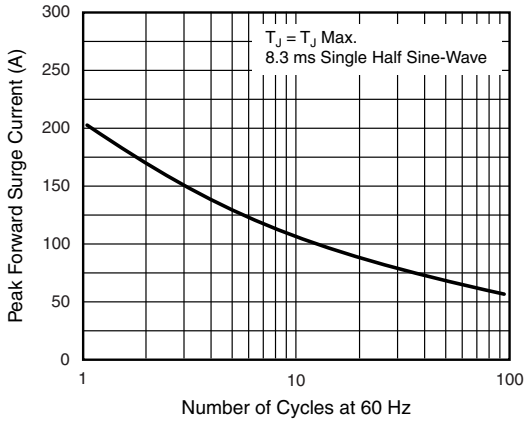


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current Per Diode

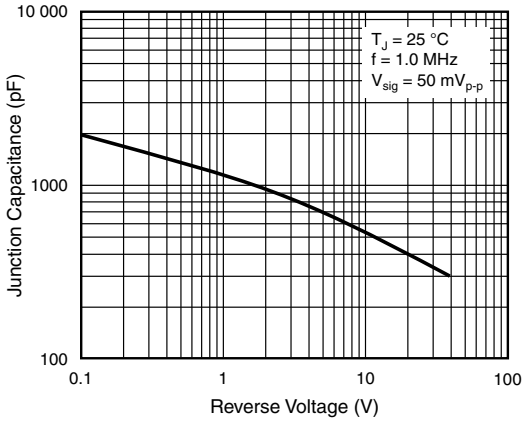


Fig. 5 - Typical Junction Capacitance Per Diode

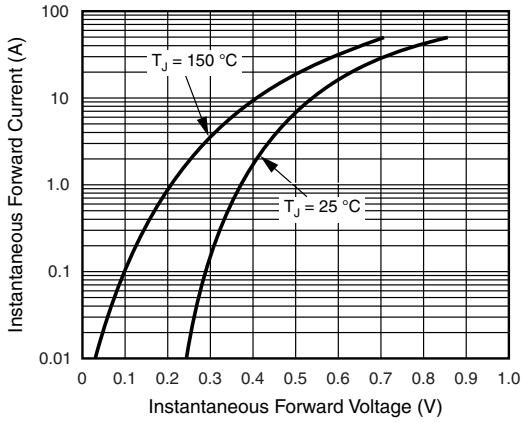


Fig. 3 - Typical Instantaneous Forward Characteristics Per Diode


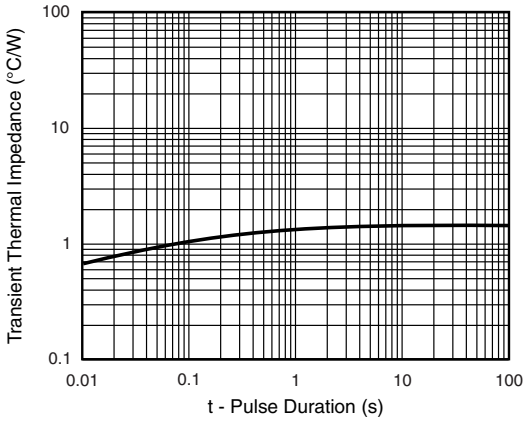


Fig. 6 - Typical Transient Thermal Impedance Per Diode


www.sycelectronica.com.ar

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)


TO-220AB

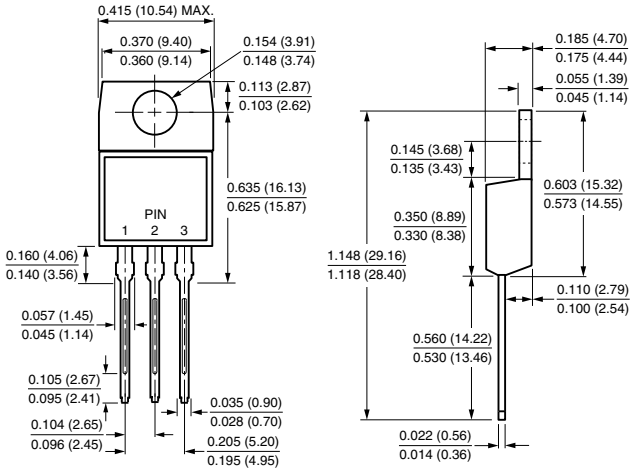

ITO-220AB

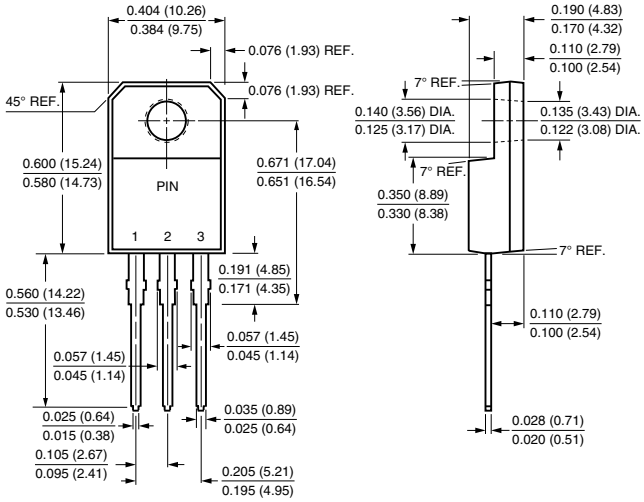

TO-263AB

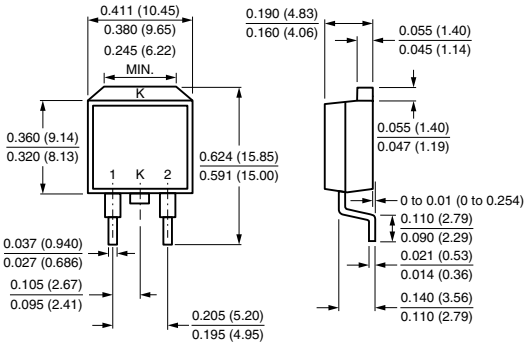

Mounting Pad Layout

